

Graze Custom Wall Bracket Installation



Use these instructions to install custom mounting brackets for Philips Color Kinetics Graze fixtures.

These instructions apply to Tempest Accessory part numbers:

4781.424D


4781.424D2

Installation must be performed by a licensed electrician, in compliance with all applicable national and local electrical codes.


Both these items are designed to mount two Graze fixtures, one lighting up a wall, the other lighting down.

The two styles are intended for different locations, but do the same job, and are very similar to install.

4781.424D

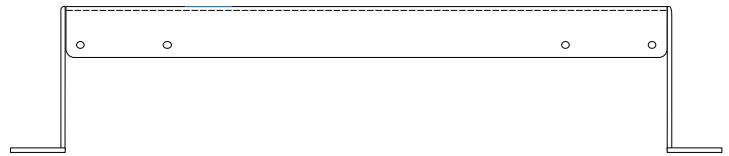

4781.424D2

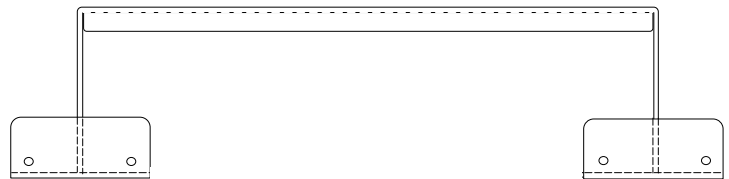

- 1 Mount the bracket to the wall, using appropriate screws and wall anchors (not included). Screws may be up to ¼" diameter. 4781.424D requires 4 mounting screws. 4781.424D2 requires 3 mounting screws.
- 2 Following the fixture manufacturer's instructions, assemble the mounting hinges onto the Graze fixtures. Use a hex key to loosen the captive hinge mounting plates, so they can slide in the fixture extrusion.
- 3 Mount the hinges onto the custom brackets, using the ¼-20 screws and washers provided.
- 4 Check that the fixtures are centered on the brackets, angle and lock in place, following the fixture manufacturer's instructions.